

6020 SERIES

Hydraulic, High Pressure, Low-torque Hand Knob
Pressure Reducing Regulators



The high pressure, hydraulic Premier 6020 Series pressure reducing regulators are single stage, piston sensed, variable delivery, pressure reducing regulators, designed for inlet and outlet pressures up to 10000 PSIG (689.5 Bar), and Cv 0.06, 0.12, 0.2, or 0.3. This regulator features an easily adjusted, ball bearing hand knob for smooth adjustments.

Premier 6020 Series regulators are used to regulate a broad range of non-corrosive and corrosive media (based on materials of construction). Premier 6020 Series regulators can be supplied with a wide range of inlet and outlet configurations.

FEATURES

- Low-torque hand knob
- Captured-venting
- Cv: 0.06, 0.12, 0.2, or 0.3
- Machined bar stock body, bonnet and piston eliminates porosity found in castings
- Economical pricing

SOME APPLICATIONS WILL REQUIRE A CUSTOM SOLUTION.
CONTACT PREMIER INDUSTRIES TO REQUEST A MODIFICATION
OR A CUSTOM DESIGN.

SPECIFICATIONS

- **MAXIMUM INLET PRESSURE (SS) :**
 - 10000 PSIG (689.5 Bar)
- **MAXIMUM INLET PRESSURE (BRASS) :**
 - 6000 PSIG (413.7 Bar)
- **CONTROL PRESSURE RANGES:**
 - 0-200 PSIG (0-13.8 Bar)
 - 5-500 PSIG (0.35-34.5 Bar)
 - 5-800 (0.35-55.2 Bar)
 - 10-1500 PSIG (0.69-103.4 Bar)
 - 15-2500 PSIG (1.0-172.4 Bar)
 - 25-4000 PSIG (1.7-275.8 Bar)
 - 50-6000 PSIG (3.4-413.7 Bar)
 - 100-10000 PSIG (6.9-689.5 Bar)
- **FLOW (Cv):** 0.06, 0.12, 0.2, or 0.3
- **OPERATING TEMPERATURES:**
 - BUNA-N: -15°F / -26°C* to 165°F / 74°C
 - VITON®: -4°F / -20°C* to 165°F / 74°C
 - EPDM: -65°F / -54°C to 165°F / 74°C

** lower temperature compounds are available*

MATERIALS OF CONSTRUCTION

- **BODY :**
 - 316 Stainless Steel
 - SAE 360 Brass
- **BONNET:**
 - 17-4 Stainless Steel
 - SAE 360 Brass
- **OTHER WETTED PARTS:** 316 Stainless Steel
- **O-RING MATERIAL OPTIONS:**
 - Viton®
 - Buna-N
 - EPDM
 - FFKM (*contact Premier for pricing*)
 - AFLAS®
 - Nitrile, lo-temp
- **BACK-UP RINGS:** PTFE, and PCTFE
- **MAIN VALVE:**
 - 316 Stainless Steel & 17-4 Stainless Steel
- **MAIN VALVE SEAT:** 316 Stainless Steel
- **STANDARD LUBRICANT:**
 - Krytox GPL 206

PORTING

- **INLET PORTING OPTIONS:**
 - 1/4", 3/8", 1/2" FNPT
 - 1/4", 3/8", 1/2" SAE J1926
 - 1/4", 3/8", 1/2" SAE AS5202 (MS33649**)
 - 1/4", 3/8", 9/16" Medium Pressure
 - **OUTLET PORTING OPTIONS:**
 - 1/4", 3/8", 1/2" FNPT
 - 1/4", 3/8", 1/2" SAE J1926
 - 1/4", 3/8", 1/2" SAE AS5202 (MS33649**)
 - 1/4", 3/8", 9/16" Medium Pressure
- ** SAE AS5202 supersedes MS33649

OPTIONS

- Gauges
- Private label
- Panel mounting bracket: P/N: 30-10059
(Ø2.15 panel hole)

Vespe® and Viton® are registered trademarks of E.I. duPont de Nemours and Company

AFLAS® is a registered trademark of the Asahi Glass Co., Ltd.


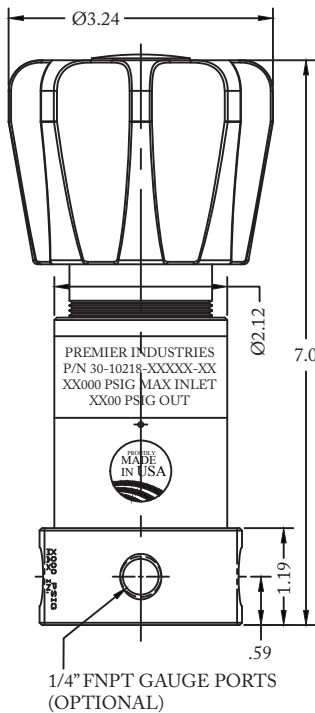
Krytox® is a registered trademark of e Chemours Company FC, LLC.

Contact factory for material certifications. Fees may apply.

6020 SERIES

Hydraulic, High Pressure, Low-torque Hand Knob
Pressure Reducing Regulators

PART NUMBER: 30-10218C







PORT TYPE	ØA	FLATS
NPT, NPTF	Ø2.48	—
1/4" M.P.	Ø2.48	2.36
1/4" & 3/8" SAE	Ø2.98	2.81
3/8" M.P.	Ø2.98	2.81
1/2" SAE	Ø3.23	2.98
9/16" M.P.	Ø3.23	2.98

SERIES	-	1	2	3	4	5	-	6 7	8	-	MODS
30-10218C	-						-			-	

1	BODY/BONNET MATERIALS (MAX. INLET PRESSURE)
1	SAE 360 BRASS BODY/BONNET (6000 PSIG / 413.7 Bar)
2	316SS BODY, 17-4SS BONNET (10000 PSIG / 689.5 Bar)
2	OUTLET PRESSURE
0	0-200 PSIG (0-13.8 Bar)
1	5-500 PSIG (0.34-34.5 Bar)
2	5-800 PSIG (0.34-55.2 Bar)
3	10-1500 PSIG (0.69-103.4 Bar)
4	15-2500 PSIG (1.0-172.4 Bar)
5	25-4000 PSIG (1.7-275.8 Bar)
6	50-6000 PSIG (3.4-413.7 Bar)
7	100-10000 PSIG (6.9-689.5 Bar) (stainless steel only)

3	FLOW (Cv)
0	Cv 0.06
1	Cv 0.12
2	Cv 0.2
3	Cv 0.3
4	PORT SIZE
4	1/4"
6	3/8"
8	1/2"*
9	9/16"***
<i>GUAGE PORTS: 1/4" FNPT VENT PORT: 1/4" inlet/outlet port type *1/2" not available in medium pressure **9/16" only available in medium pressure.</i>	
5	PORT TYPE
1	FNPT
2	SAE J1926
3	SAE AS5202 (MS33649)
4	MEDIUM PRESSURE

6 7	O-RINGS
00	BUNA-N
01	AFLAS®
02	VITON®
05	EPDM
11	FFKM <i>(contact Premier for pricing)</i>
12	NITRILE, LO-TEMP
8	PORT CONFIGURATION
A	
C	
L	
S	
MODIFICATIONS	
<i>Separate multiple mods with a dash</i>	
BLANK	NONE
AC	KRYTOX® 240AC
SM	SURFACE MOUNT*
PTU	PORT TYPE UNIFORM
<i>*SURFACE MOUNT: PATTERN DEPENDENT ON PORT TYPE, SIZE, AND CONFIGURATION</i>	

10000 PSIG MAX INLET
The end user is responsible to ensure adequate fittings are used to connect regulator to plumbing.

Krytox® is a registered trademark of The Chemours Company FC, LLC.

Viton® is a registered trademark of E.I. duPont de Nemours and Company

AFLAS® is a registered trademark of the Asahi Glass Co., Ltd.

Contact factory for material certifications. Fees may apply.